

Additional manual

Emergency battery for PULL T24, -T24speed




Important for use with emergency battery

- The motor can be equipped with an additional optional battery (NB), which can be integrated into the operator and can be fixed with bolttable bracket (B).


IMPORTANT BEFORE CONNECTION OF BATTERY:

- Mount the operator completely.
- Make the electric wiring incl. 230V connection.
- Make sure that there is a 230V power supply before connecting the battery.
- Disconnect the 4pol. clamp block (KL).
- Grey battery cable (- Pol) → connect to control terminal 18.
- Remove protection tube (S) of yellow battery cable.
- Yellow battery cable (+ Pol) → connect to control terminal 19.
- Connect the 4pol. clamp block (KL) again.

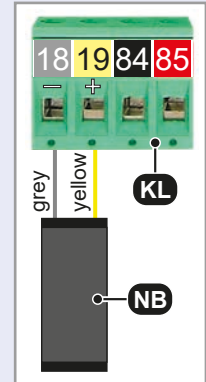

IMPORTANT

- Make the battery connection with great care, so that there is no short-circuit (the battery is pre-loaded !)
- Make sure that there is a 230V power supply before connecting the battery
- For repair and maintenance works please remove first the clamp block/terminal (KL) and then turn off the 230V power supply !
- When reconnecting again first turn on the 230V power supply and then attach the clamp block/terminal (KL).

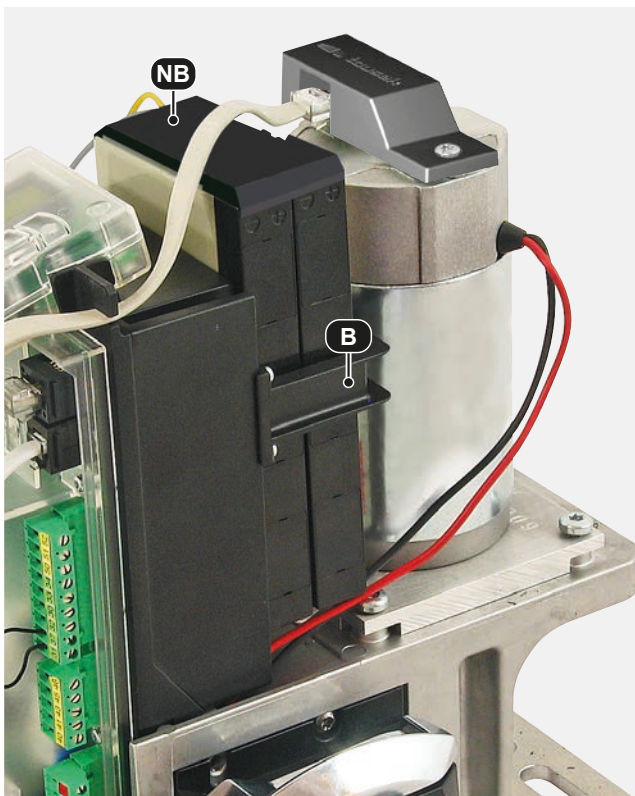

tousek
GATE AUTOMATION

Tousek Ges.m.b.H.
Österreich
A-1230 Wien
Zetschegasse 1
Tel. +43/1/667 36 01
Fax +43/1/667 89 23
info@tousek.at

Tousek GmbH
Deutschland
D-83395 Freilassing
Traunsteiner Straße 12
Tel. +49/86 54/77 66-0
Fax +49/86 54/57 196
info@tousek.de

Tousek
Benelux NV
BE-3930 Hamont - Achel
Buitenheide 2A / 1
Tel. +32/ 11/ 91 61 60
Fax +32/ 11/ 96 87 05
info@tousek.be

Tousek Sp. z o.o.
Polen
PL 43-190 Mikołów (k/Katowic)
Gliwicka 67
Tel. +48/32/738 53 65
Fax +48/32/738 53 66
info@tousek.pl

Tousek s.r.o.
Tschechische Rep.
CZ-252 61 Jeneč u Prahy
Průmyslová 499
Tel. +420 / 777 751 730
info@tousek.cz