

Installation- and Operating Instructions

Swing gate operator TURN/UP 1, TURN/UP 2



tousek[®]
G A T E A U T O M A T I O N





Important warning and safety notes for installation and operation

- These installation- and operating instructions form an integral part of the product "gate operator". They have been specifically written for professional installers trained and skilled in the trade and should be carefully read in their full length before carrying out the installation. They describe the proper installation and operation of the sliding gate operator only, not of the overall device "automatic gate". After the installation this manual has to be handed over to the user.
- **Installation, connection, adjustments, putting into operation, and servicing may only be carried out by trained professionals in full accordance with these installation- and operating instructions.**
- The EU Machine Directive, laws and rules concerning the prevention of accidents, and laws and standards which are in force in the EU and in the individual countries have to be strictly followed.
- The TOUSEK Ges.m.b.H. cannot be held liable for any claims resulting from disregards of the laws and standards in force during the installation and operation.
- The product may only be used in accordance with its original purpose, for which it has been exclusively designed, and which is described in these installation and operating instructions. The TOUSEK Ges.m.b.H. rejects any liability if the product is used in any way not fully conforming to its original purpose as stated herein.
- **The product is not suitable for installation in explosion-hazardous areas. The existence of inflammable gas and steam is of great danger !**
- The packaging materials (cardboard, plastic, EPS foam parts and filling material etc.) have to be properly disposed of in accordance with the applying recycling- and environmental protection laws. They may be hazardous to children and therefore have to be stored out of children's reach.
- Before beginning with the installation the installer has to make sure that all mechanical components of the gate facility, like carrier profile/rail, gate frame and panels, guiding elements etc. are sufficiently supportive and resistant for the purpose of gate automation. Check also whether the product has transport damages.
- All electrical installations have to be made in full conformity with the applying rules and laws (e.g. using a fault current circuit breaker, proper grounding etc.).
- An all-pole disconnecting main switch with a contact opening-gap of minimum 3 mm has to be foreseen.
- When installing the safety device (photocells, safety edges, emergency-stops etc.) please comply with the valid directives/standards, the criteria of practical rules of conduct, the installation environment, the operating logic of the system and the effected force of the motorised gate.
- The safety devices must secure possible bruise, shear and general danger areas of the motorised gate.
- After installation the proper function of the gate facility and the safety devices has to be checked!
- Place warning signs and notes of the valid regulations to indicate danger areas.
- With each installation the identification data of the motorised gate has to be placed in a visible place.
- The label for the Handauslöser has to be placed next to its operating element.
- The electric motor heats up during operation. Therefore the device should only be touched after it has cooled off.
- Please make sure that no other persons are on site of the motorised gate area, especially in when operating the facility in hold to run mode (switch with OFF-pre adjustment). The pre-adjusted OFF-button/switch has to be placed in sight of the actuated gate but away from moving parts. This switch/button (except key-switch) has to be mounted in min. 1,5m height and non-accessible to the public.
- **Children have to be instructed, that the gate facility as well as the belonging parts may not be used improperly, e.g. for playing. Furthermore handheld transmitters have to be kept in safe places and other impulse emitters as buttons and switches have to be installed out of children's reach.**
- Only original spare- and replacement parts may be used for repair of the product.
- The TOUSEK Ges.m.b.H. rejects any liability for claims resulting from usage of the product in combination with components or devices which do not fully conform to the applying safety laws and rules.
- The installer has to inform the user about all aspects of the automatic operation of the complete gate facility, as well as about emergency operation. The installer further has to supply to the user all instructions relating to the safe operation of the gate facility. The installation and operating instructions also have to be handed over to the user.
- The user has to be informed that he has to turn off the main power switch in case of malfunction of the product and that he can use the facility again after repair and adjustment works have been completed.
- **Please notice that the warranty will not be applicable if the label with the engine number has been removed or damaged.**



Maintenance

- **Disconnect the power supply during mounting, maintenance and repair works.**
- **Maintenance works may only be carried out by qualified personnel.**
- **Check the proper force adjustment once a month.**
- **Check the proper function of the emergency release mechanism periodically.**
- **Check if all mounting screws are securely fastened periodically.**
- **Remove dirt from the operator periodically.**
- **Lubricate the pivot points of the operator with grease and the push rod with WD40 spray (twice a year or as needed).**
- **Maintenance and servicing of the complete gate facility has to be carried out according to the gate builder's/ installer's instructions.**

Swing gate operator TURN/UP 1, TURN/UP 2

Electromechanical swing gate operator


- for 230Va.c.
- max. weight of gate wings 350 kg
- suitable for installation at already existing gates
- incl. mounting parts
- self-locking steel spindle
- for private use, approx. 20 cycles/day



General features

The swing gate operator TOUSEK TURN UP can be easily installed at new and also already existing swing gate facilities. The drive unit works electromechanically and consists of a connecting rod made of stainless steel with an integrated, self-locking spindle and a high-performance single-phase motor. These components are situated in an aluminium housing. Due to its self-locking spindle the operator guarantees the blocking of the gate and therefore usually no electric-lock is required. But depending on the individual situation of assembly it may be necessary to install an additional locking (e.g. e-lock) for reaching a fix blocking of the gate in its travel limits – even at self-blocking gate operators. A key for emergency release permits the manual opening of the gate in case of e.g. power failures.

At rising gate entrances, additionally the optional hinge joint has to be mounted.



Technical data

Drehmotorantrieb	TURN/UP 1	TURN/UP 2		TURN/UP 1	TURN/UP 2
Power supply	230Va.c. ± 10%, 50Hz		Hoisting speed	18,8mm/s	
Current consumption	1,7A		Max. stroke	300mm	400mm
Condenser	8µF		Max. length of wing	2,5m	3,0m
Max. thrust	2800N		Max. weight of wing	350kg	
max. inclination / gradient of gate entry	10° *)		Duty cycle (S3)	20 cycled/day	
			article no.	left: 11260170 right: 11260180	left: 11260190 right: 11260200

Other

blocking in closed position, optional bracket for ascending gates



- Max. wing widths do neither apply to full-panel gates (but to stave or trellised gates) nor to non-horizontal gates!
- *) With rising gates the max. leaf width and gate weight have to be reduced up to 50%. The pillar sided support bracket for the operator enables a possible gradient of up to 10°.





ATTENTION: RISK OF INJURY / DANGER OF DRIVE AND PROPERTY DAMAGE:

- with rising / descending gates it is absolutely necessary to install a damper (e.g. a gas pressure damper) in order to avoid uncontrolled movements of the gate leaves when the motor is released!



General installation notes

- Before beginning the installation of the operators, please make sure that the gate wings are already limited in their travel by the stopping devices (3) both in the open and closed gate positions. If this is not the case, please install such stopping devices or use the Tousek piston rod stroke limiting device. The spindle doesn't have to be fully extended (approx. 5 mm residual way)!
- With lean or wooden gates the front mounting part (1) should not be installed directly on the gate. Please use a flat steel bar.
- *) Attention: to avoid contaminations and to ensure a long lasting and reliable operation please make sure to keep a minimum distance of 400mm to the driveway top edge.
- The mounting points for the front (1) and for the rear mounting part (2) should be chosen in accordance of the below mentioned mounting measures. The adjustment/alignment of the operator should be levelled out.

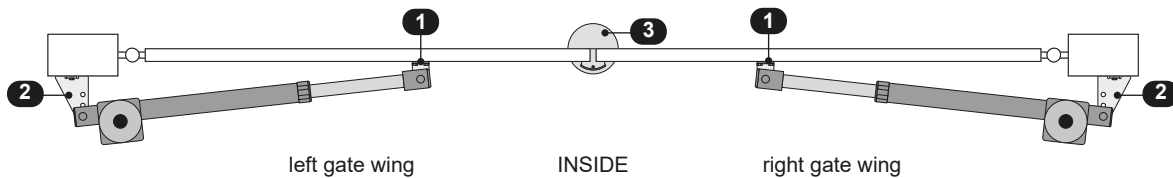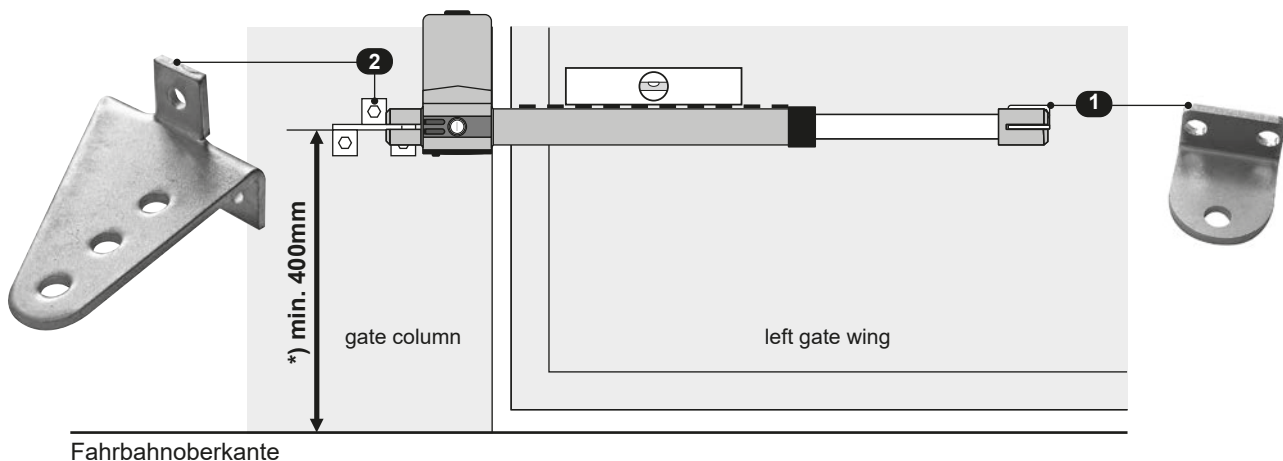

Attention

- left operator differs from the right!



2a. Definition of mounting points and attachment of mounting parts

Installation

Mounting points




Note


- The mounting points for the front (1) and for the rear mounting part (2) should be chosen in accordance of the mounting measures (see following table).
- Please note that the measures A and B must always be measured from the pivotal point of the gate.
- The adjustment/alignment of the operator should be levelled out.

Mounting measures with different swing gate situations


Opening to the INSIDE (pivotal point centered to gate leaf)

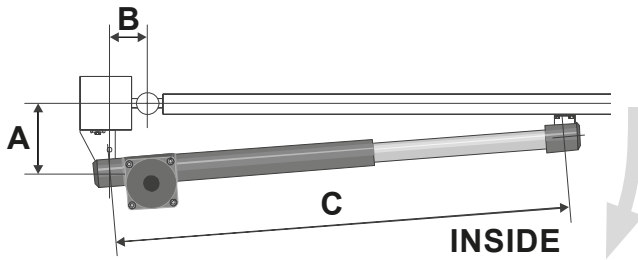

Opening to the INSIDE (pivotal point not centered (inside) to gate leaf)

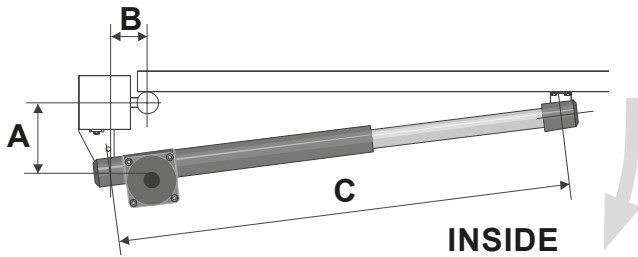

Special case: using a hinge joint

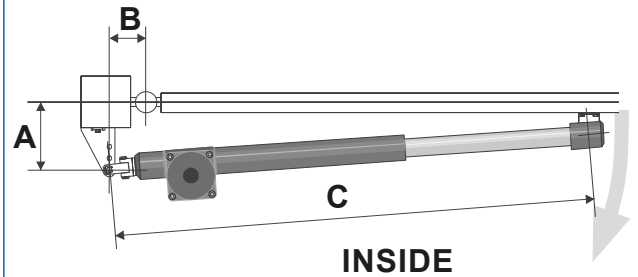


Important

- In this special case (assembly with hinge joint), measurement C has to be 85 mm longer than usual.


Mounting measures (opening to the INSIDE)	TURN/UP 1	TURN/UP 2		
Application		standard	for larger columns	for larger opening angle
A (mm)	140	190	250	150
B (mm)	140	190	140	200
C for mounting without hinge joint (mm)	935	1135	1135	1135
C for mounting with hinge joint (mm)	1020	1220	1220	1220
max. opening angle	95°	95°	90°	110°
max. opening angle	2,5m	3m	2,5m	2,5m

Mounting at larger columns

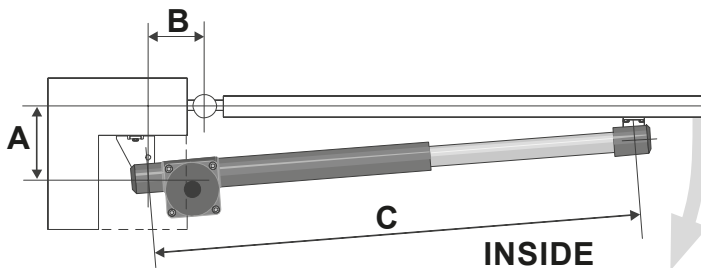

Important

- In order to keep the measurements A and B in case of larger columns and gates that open to the inside, please make an alcove according to the beside picture.
- the niche on the motor side has to be big enough, so that the connection cable doesn't have to be bent!

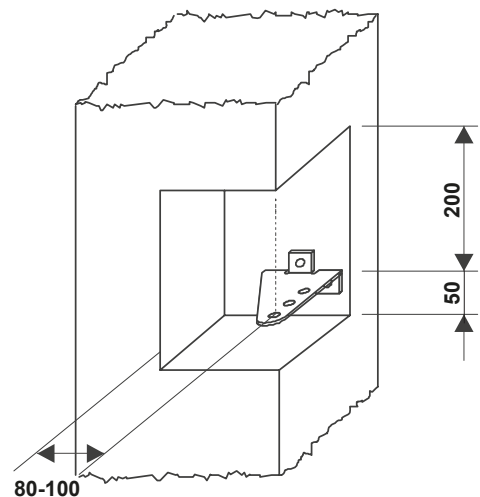

Installation of the mounting parts

Installation of the rear mounting parts

- After having defined the pivotal point (taking into account the mounting measures) attach the rear welding part (2) in that position to the gate column (wall).

Installation of the front mounting parts


- Attach the front welding part (1) to the gate wing in compliance with measure C.
- Please make sure that the gate is fully closed and the adjustment/alignment of the operator is levelled out.
- With lean or wooden gates the front mounting part (1) doesn't have to be installed directly on the gate.

Please use for that a flat steel bar.

2b. Mounting of the operator

Installation

- After fixing the assembly parts, please grease the mounting parts at their pivot points, as well as the push rod (in extended position)!
- Connect the operator first with the motor-sided (2) and afterwards with the spindle-sided (1) assembly part. Insert the cylinder bolt into the hole (the internal thread M6 has to look down) and secure the bolt by tightening the screws M14.

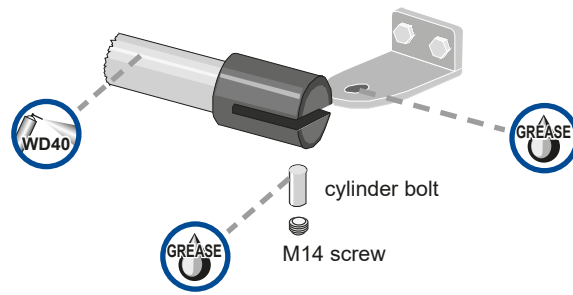

Greasing of the moving mounting parts and of the push rod

- All the pivot points (the drills of the mounting parts and the corresponding bolts, which allow a defined mounting of the actuator) have to be lubricated with grease before mounting the automation!
- Also spray the push rod (in extended position) with WD40!
- Let the automation run two or three times (open and close it)
- Grease the automation regularly (according to the maintenance instructions).





Warning



- Before carrying out the electrical connections, the power supply of the gate facility must be turned off
- The safety regulations for electric shock prevention have to be complied.
- The device should only be connected by qualified personnel
- The device should not be used in an explosive environment !
- An all-pole disconnecting mains switch with a contact opening gap of min. 3 mm has to be foreseen. The gate facility has to be secured according to the valid safety regulations!
- **IMPORTANT:** The control lines (buttons, radio, photocells, etc.) have to be laid separately from the 230V lines (supply line, motors, signal lamp).
- The safety standards and regulations regarding the force adjustment have to be in compliance with the effective rules !

- The gate facility must be turned off from power supply when making the electrical connections.
- The operator has to be connected to the control unit as described in the manual of the control unit.
- For the connection of diverse safety devices, transmitters and other accessories please check the corresponding manuals (please note cable/wire plan).
- Force adjustment: the force adjustment of the operator is made through the control unit (please see manual for control unit).
- End switch: the operator works without limit switches. The necessary run time is adjusted in the control unit.

2d. Dismounting

The dismounting of the motor is effected in the opposite order of installation.



Please note that before dismounting the operator the power supply has to be turned off !

3. Emergency release of the operator at power failure

TURN UP 1, TURN UP 2



ATTENTION: RISK OF INJURY / DANGER OF DRIVE AND PROPERTY DAMAGE:

- with rising / descending gates it is absolutely necessary to install a damper (e.g. a gas pressure damper) in order to avoid uncontrolled movements of the gate leaves when the motor is released!

- Should it be necessary to release the operator (e.g. in case of power failure, please proceed as follows:

- **Turn off power supply of gate facility!**



- ➊ Turn the release key clockwise until the key is in the horizontal position (90°).
- ➋ Pull forward the emergency release lever (as shown).
- ➌ Now turn the key clockwise by further 90 ° (the key can be removed when in this position). The gate is now unlocked. Now move the gate slowly (not faster than in usual motor operation).

For returning to normal motor operation slightly lift the emergency release lever and turn the key counterclockwise by 90°.

Fold the emergency release lever and bring it to the original position.

Then turn the key a further 90 ° counter-clockwise (key now stands vertically and can be removed).

- After that turn on the power supply.



operator locked



➊



➋




➌ operator released

4. Cable plan

Drehmotorantrieb TURN UP 1, TURN UP 2

- | | |
|--|--|
| 1 operator Tousek TURN UP | 7 main power switch and fuse 12A |
| 1a connection box | Note: An all-pole disconnecting main switch with a contact opening-gap of minimum 3 mm has to be foreseen. |
| 2 electronic logic control
(optional with integrated radio receiver) | 8 pushbutton momentary contact switch |
| 3 external antenna (for increased range) | 9 key-operated momentary contact switch |
| 4 signal light | 10 safety sensing edges |
| 5 external photocell | 11 hinged locking bar |
| 6 internal photocell | 12 electric lock |
| (T: transmitter, R: receiver) | 13 floor stops |

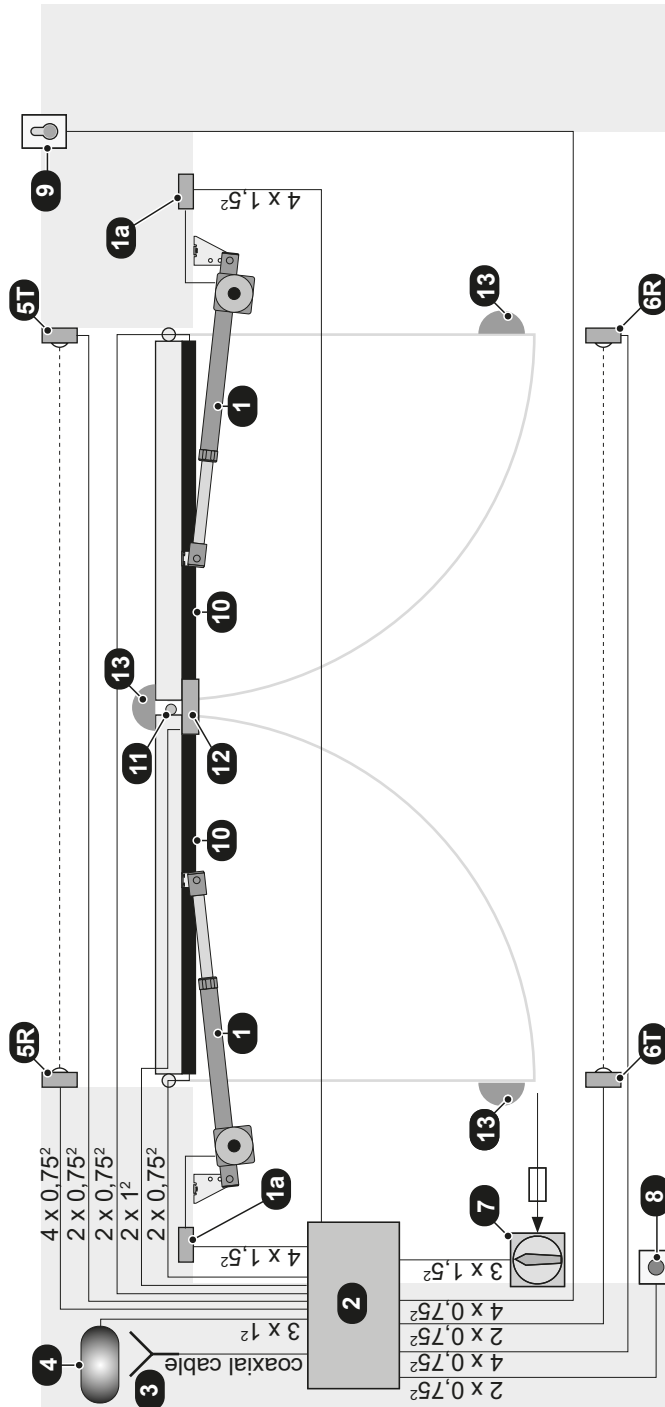

NOTE concerning cable

The electric cables have to be laid in insulating sleeves which are suitable for underground usage.

230 V cables and control lines have to be laid in separate sleeves.

Only double-insulated cables, which are suitable for underground usage (e.g. E-YY-J) may be used.

In case that special regulations require another type of cable, cables according to these regulations have to be used.

SAFETY NOTE

Please be aware that the beside picture is only a symbolic sample illustration of a gate facility and may therefore not show all safety devices required for your specific application. To achieve an optimum safety level at your gate facility, please make sure that all safety components and accessories which

- according to the applying safety rules and laws - are required in your particular case (e.g. photocells, induction loops, sensing edges, signal lamps, traffic lights, mains- and emergency power off switches etc.) are properly installed, operated, and serviced. All possible bruise, shear and general danger areas of the motorised gate have to be secured.


In this context please follow the EU Machine Directive, accident prevention rules and laws, as well as applying EU- and national standards in force at the time of installation and operation of the gate facility.

The Tousek Ges.m.b.H. cannot be held responsible for any consequences resulting from disregard of applying standards and laws during installation or operation of the gate facility

The 0,75mm² control lines are shown without ground lead. In order to facilitate connections we recommend using flexible wires and not using thicker wires for the control lines.

TURN UP 1, TURN UP 2

-

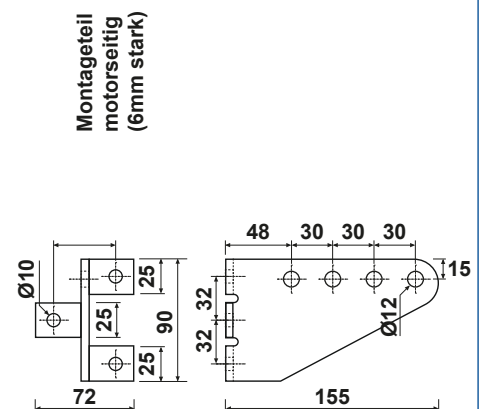

tousek / EN_TURN-UP_42000607 / 12. 03. 2020

Declaration of incorporation

In compliance with EC Machine Directive 2006/42/EC, Annex II B for the installation of an incomplete machine.

We hereby declare that the following product, as well as its version, put by us into circulation, complies with the essential requirements of the Machinery Directive (2006/42/EC), due to its design and type of construction.

The validity of this declaration will cease in case of any unauthorized modifications to the products.

The product:

Swing gate operator TURN 10, 20, UP 1, UP 2P

is developed, designed and manufactured in accordance with:

Machinery Directive 2006/42/EG
Low Voltage directive 2014/35/EU
Electromagnetic compatibility 2014/30/EU

Applied and used standards and specifications:

EN ISO 13849-1, PL-,c"
EN 60335-1
EN 60335-2-103
EN 61000-6-3
EN 61000-6-2

Following requirements of Annex I of the EC Directive 2006/42/EC are met:

1.1.2, 1.1.3, 1.1.5, 1.2.1, 1.2.2, 1.2.3, 1.2.6, 1.3.2, 1.3.4, 1.3.7, 1.5.1, 1.5.4, 1.5.6, 1.5.8, 1.7

The relevant technical documentation is compiled in accordance with Annex VII, Part B of the EC Machinery Directive 2006/42/EC.

We undertake to submit it in electronic form and within a reasonable time to the market surveillance authorities in response to a duly substantiated request.

TOUSEK Ges.m.b.H., A1230 Wien, Zetschegasse 1, Austria

is authorized to compile the technical documentation.

The incomplete machine cannot be put into service, until it is determined that the machine, into which the incomplete machine has to be inserted, complies with the the Machine Directive 2006/42/EC.



Eduard Tousek, CEO

Vienna, 01. 01. 2015

EC Declaration of Conformity

In compliance with EC Machine Directive 2006/42/EC, Annex II, Part 1 A.

When the described operators are connected to a gate they form a machine in the sense of the EC Machine Directive.

Relevant EU directives:

Construction Products Directive 89/106/EWG
Machinery Directive 2006/42/EG
Low Voltage directive 2014/35/EU
Electromagnetic compatibility 2014/30/EU

We hereby declare that the following product, in the version put by us into circulation, complies with the essential requirements of the Directives mentioned above. The validity of this declaration will cease in case of any unauthorized modifications to the products.

Product:

Gate description

Motor description

The incomplete machine cannot be put into service, until it is determined that the machine, into which the incomplete machine has to be inserted, complies with the the Machine Directive 2006/42/EC.

Installation company

Address, ZIP code, Place

Date/ Signature

Motor number (Type plate):

Other components:

tousek PRODUCTS

- sliding gate operators
- cantilever systems
- swing gate operators
- garage door operators
- folding door operators
- traffic barriers
- electronic controls
- radio remote controls
- key operated switches
- access control
- safety devices
- accessories

Tousek Ges.m.b.H. Austria
A-1230 Vienna
Zetschegasse 1
Tel. +43/ 1/ 667 36 01
Fax +43/ 1/ 667 89 23
info@tousek.at

Tousek GmbH Germany
D-83395 Freilassing
Traunsteiner Straße 12
Tel. +49/ 8654/ 77 66-0
Fax +49/ 8654/ 57 196
info@tousek.de


Tousek Benelux NV
BE-3930 Hamont - Achel
Buitenheide 2A/ 1
Tel. +32/ 11/ 91 61 60
Fax +32/ 11/ 96 87 05
info@tousek.be

Tousek Sp. z o.o. Poland
PL 43-190 Mikołów (k/Katowic)
Gliwicka 67
Tel. +48/ 32/ 738 53 65
Fax +48/ 32/ 738 53 66
info@tousek.pl

Tousek s.r.o. Czech Republic
CZ-252 61 Jeneč u Prahy
Průmyslová 499
Tel. +420 / 777 751 730
info@tousek.cz



your service partner:

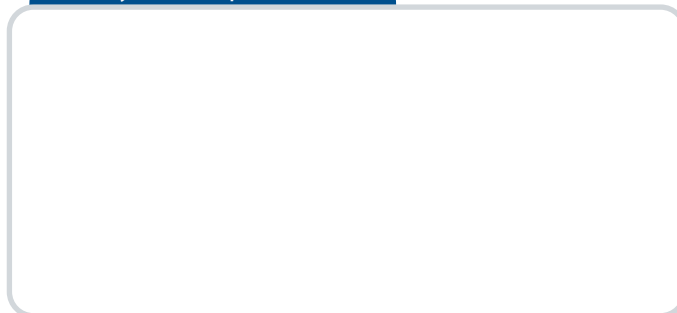

tousek

EN_TURN-UP_42000607
12. 03. 2020

We reserve the right to change dimensions and/or technical specifications without prior notice. Claims resulting from misprints or errors cannot be accepted.